



### Application

- Machine condition monitoring to ISO 20816-
- General vibration measurement in laboratory and industry
- Quality control

### Properties


- Measurement of the RMS of vibration velocity or severity
- Precision shear type accelerometer with magnetic base
- Automatic detection of measuring points via the sensor base with electronic VMID measuring points
- Graphical trend display
- Memory for 16000 measurements
- USB interface
- PC software for measuring point management to MIMOSA convention (ISO 13373-1) and measuring data archiving
- Simple operation - no training required
- Brilliant, power-saving colored OLED display
- Economic AAA batteries or accumulators
- Pocket-sized

Manfred Weber

**Metra Mess- und Frequenztechnik in Radebeul e.K.**



TOTLEY bv  
Rollebeekstraat 14  
1650 BEERSEL - BELGIUM  
email : sales@totley.eu  
web : www.totley.eu  
Tel : +32 2 377 90 36

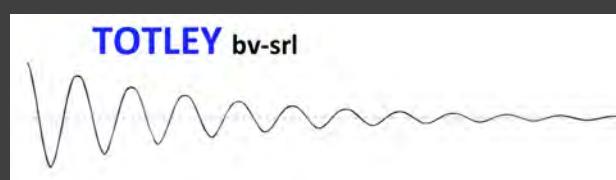

Dynamic traceable calibration of sound and vibration instrumentation and transducers, Consulting, Management, Engineering and Total Solutions provider in Electronic Instrumentation

## Technical Data

### Measurement functions

Measurands	Vibration velocity/severity
Overall values	True RMS value
Measuring range velocity	0.1 to 1000 mm/s
Accuracy	±5 (±2 digits) %
ADC resolution	24 Bit
Vibration trend	Graphical history of the saved vibration values
Lower frequency limit velocity	10 Hz
Indication	OLED; RGB; 128 x 160 pixels

### Connectors

Input channels	1
Input signals	Low power IEPE
Input connector	Socket Binder 711; 3 pins
IEPEconstant current	1.9 to 2.9 mA
Digital interfaces	USB 2.0 FS; CGC mode; ASCII command set; Binder 712; 8 poles

### Power Supply

Battery	3 x LR03 / HR03 / AAA
Battery operating time	8 to 12 h
External supply voltage	USB; 5 VDC

### Case Data


Dimensions without connectors	125 x 65 x 27 (H x W x D)	mm
Case material	ABS	
Weight	140 (without sensor)	g
Operating temperature range	-20 to 60 (95 % rel. humidity without condensation)	°C

Scope of delivery	Accelerometer KS82L with spiral cable USB cable VMID measuring point sample Carrying case
-------------------	--

Optional accessories	VMID measuring points sensor probe VM2x-T PC software VM2x Measurement Data Base
----------------------	--

### Notice

Upon request, we offer an accredited calibration to DIN EN ISO/IEC 17025:2018.

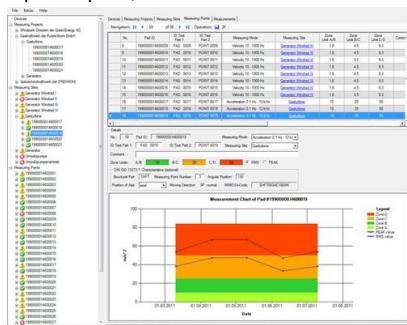


Manfred Weber

**Metra Mess- und Frequenztechnik in Radebeul e.K.**



**TOTLEY bv**  
Rollebeekstraat 14  
1650 BEERSEL - BELGIUM  
email : sales@totley.eu  
web : www.totley.eu  
Tel : +32 2 377 90 36

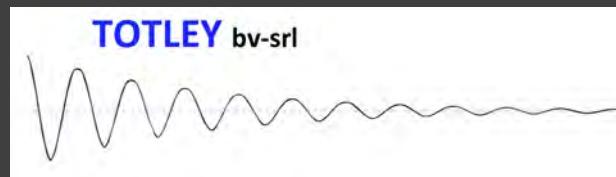

Dynamic traceable calibration of sound and vibration instrumentation and transducers, Consulting, Management, Engineering and Total Solutions provider in Electronic Instrumentation