



Application

- Machine condition monitoring to ISO 20816-
- General vibration measurement in laboratory and industry
- Quality control

Properties


- Measurement of vibration acceleration, velocity and displacement
- True RMS, peak value and crest factor
- Precision shear type accelerometer with magnetic base
- Automatic detection of measuring points via the sensor base with electronic VMID measuring points
- Graphical trend display
- Memory for 16000 measurements
- USB interface
- PC software for measuring point management to MIMOSA convention (ISO 13373-1) and measuring data archiving
- Brilliant, power-saving colored OLED display
- Economic AAA batteries or accumulators
- Pocket-sized

Manfred Weber

Metra Mess- und Frequenztechnik in Radebeul e.K.



TOTLEY bv
Rollebeekstraat 14
1650 BEERSEL - BELGIUM
email : sales@totley.eu
web : www.totley.eu
Tel : +32 2 377 90 36

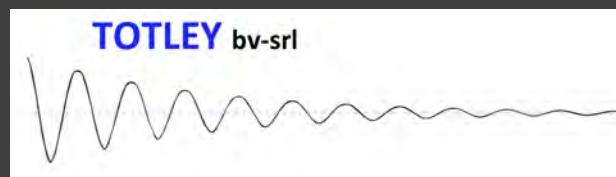

Dynamic traceable calibration of sound and vibration instrumentation and transducers, Consulting, Management, Engineering and Total Solutions provider in Electronic Instrumentation

Technical Data

Measurement functions

Measurands	Vibration acceleration Vibration velocity/severity Vibration displacement	
Overall values	True RMS value True pak value	
Measuring range acceleration	0.1 to 240	m/s ²
Measuring range velocity	0.1 to 1000	mm/s
Measuring range displacement	0.01 to 60000	µm
Accuracy	±5 (±2 digits)	%
ADC resolution	24	Bit
Vibration trend	Graphical history of the saved vibration values	
Lower frequency limit acceleration	0,1; 0,2; 3; 1000	Hz
Lower frequency limit velocity	2; 10	Hz
Upper frequency limit acceleration	1000; 10000	Hz
Upper frequency limit velocity	1000	Hz
Upper frequency limit displacement	200	Hz
Indication	OLED; RGB; 128 x 160 pixels	

Connectors

Input channels	1
Input signals	Low power IEPE
Input connector	Socket Binder 711; 3 pins
IEPEconstant current	1.9 to 2.9
Digital interfaces	USB 2.0 FS; CGC mode; ASCII command set; Binder 712; 8 poles


Power Supply

Battery	3 x LR03 / HR03 / AAA
Battery operating time	8 to 12
External supply voltage	5 (USB)

Case Data

Dimensions without connectors	125 x 65 x 27 (H x W x D)	mm
Case material	ABS	
Weight	140 (without sensor)	g
Operating temperature range	-20 to 60 (95 % rel. humidity without condensation)	°C

Scope of delivery	Accelerometer KS82L with spiral cable USB cable VMID measuring point sample Carrying case
-------------------	--

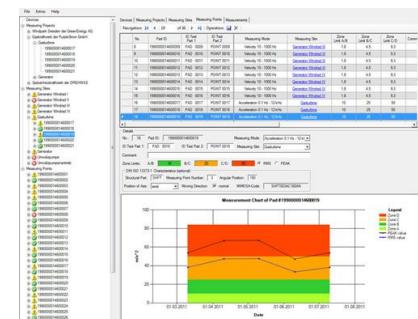

Optional accessories	VMID measuring points sensor probe VM2x-T PC software VM2x Measurement Data Base
----------------------	--


Notice	Upon request, we offer an accredited calibration to DIN EN ISO/IEC 17025:2018.
--------	--

Manfred Weber

Metra Mess- und Frequenztechnik in Radebeul e.K.



TOTLEY bv
Rollebeekstraat 14
1650 BEERSEL - BELGIUM
email : sales@totley.eu
web : www.totley.eu
Tel : +32 2 377 90 36

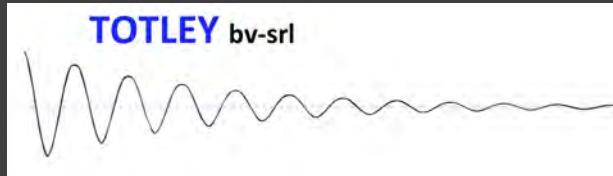

Dynamic traceable calibration of sound and vibration instrumentation and transducers, Consulting, Management, Engineering and Total Solutions provider in Electronic Instrumentation