



Application

- Machine condition monitoring to ISO 20816-
- Roller bearing monitoring to VDI 3832 etc.
- General vibration measurement in laboratory and industry
- Quality control
- Optical rotation speed measurement
- Non-contact temperature measurement

Properties


- Measurement of vibration acceleration, velocity and displacement
- True RMS, peak value and crest factor
- Precision shear type accelerometer with magnetic base
- Automatic detection of measuring points via the sensor base with electronic VMID measuring points
- Graphical trend display
- Spectral analysis (FFT) for acceleration and velocity
- Built-in infrared thermometer
- Built-in non-contact optical rpm sensor with laser pointer
- Memory for 16000 measurements
- USB interface
- PC software for measuring point management to MIMOSA convention (ISO 13373-1) and measuring data archiving
- Headphone output
- Brilliant, power-saving colored OLED display
- Economic AAA batteries or accumulators
- Pocket-sized

Manfred Weber

Metra Mess- und Frequenztechnik in Radebeul e.K.



TOTLEY bv
 Rollebeekstraat 14
 1650 BEERSEL - BELGIUM
 email : sales@totley.eu
 web : www.totley.eu
 Tel : +32 2 377 90 36

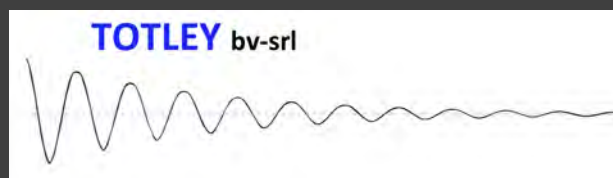

Dynamic traceable calibration of sound and vibration instrumentation and transducers, Consulting, Management, Engineering and Total Solutions provider in Electronic Instrumentation

Technical Data

Measurement functions

Measurands	Vibration acceleration	
	Vibration velocity/severity	
	Vibration displacement	
Overall values	True RMS value	
	True pak value	
	Crest factor	
	K(t) Bearing Diagnosis Coefficient	
Measuring range acceleration	0.1 to 240	m/s ²
Measuring range velocity	0.1 to 1000	mm/s
Measuring range displacement	0.01 to 60000	µm
Rotary speed measurement	Optical; built in	
RPM range	1 to 9999	min-1
Accuracy	±5 (±2 digits)	%
ADC resolution	24	Bit
Vibration trend	Graphical history of the saved vibration values	
Bearing Diagnosis Coefficient K(t)	1 - 10 kHz; with memory for 1600 rms/peak start values	
Lower frequency limit acceleration	0,1; 0,2; 3; 1000	Hz
Lower frequency limit velocity	2; 10	Hz
Upper frequency limit acceleration	1000; 10000	Hz
Upper frequency limit velocity	1000	Hz
Upper frequency limit displacement	200	Hz
Frequency analysis	FFT; 125 points; acceleration or velocity	
	10 frequency ranges from 11.5 to 11712 Hz	
Indication	OLED; RGB; 128 x 160 pixels	

Connectors

Input channels	1	
Input signals	Low power IEPE	
Input connector	Socket Binder 711; 3 pins	
IEPE constant current	1.9 to 2.9	mA
Output connector	Head phone output; Binder 712; 8 pins; with 3.5 mm audio adapter	
Digital interfaces	USB 2.0 FS; CGC mode; ASCII command set; Binder 712; 8 poles	

Power Supply

Battery	3 x LR03 / HR03 / AAA	
Battery operating time	8 to 12	h
External supply voltage	5 (USB)	VDC

Case Data

Dimensions without connectors	125 x 65 x 27 (H x W x D)	mm
Case material	ABS	
Weight	140 (without sensor)	g
Operating temperature range	-20 to 60 (95 % rel. humidity without condensation)	

Scope of delivery

Accelerometer KS82L with spiral cable
 USB cable
 VMID measuring point sample
 Headphone adapter
 Carrying case

Optional accessories

VMID measuring points
 sensor probe VM2x-T
 PC software VM2x Measurement Data Base
 Upon request, we offer an accredited calibration to DIN EN ISO/IEC 17025:2018.

